

## Introduction



LED Shop light 80W~120W design for indoor lighting.  
 Perfect replacement for traditional tubes, high bay, ceiling light.  
 Good for illuminating large work areas with consistent light.  
 Light efficiency more than 140LM/W. The 5000K white color light makes works easy. The 4ft fixture is ideal for office, industrial, hospital, warehouse and school applications.  
 LED Shop light is ETL safety certification approved,  
 5 years worry free maintenance.

## Features

Built-in AC Linear Scheme Drive Power Supply  
 120V Input Voltage  
 ETL cETL approved  
 Equipped With Pull Switch/Radar Induction Switch  
 Beam Angle 120 Degree  
 PC Lens Protect LED Chips From Damp Location  
 Die-Casting Aluminum Heat Sink  
 6K High voltage surge test approved  
 SMD2835 130lm/w Led Chips  
 50,000hrs Lifespan  
 Top Brand Rubycon Capacitor  
 OEM Special Design Company Logo  
 No UV or IR Radiation  
 No Magnetic Disturbance Driver Design


## Applications

LED SHOP LIGHT series can be widely used in Office Area, Warehouses, Factories and workshops, etc.

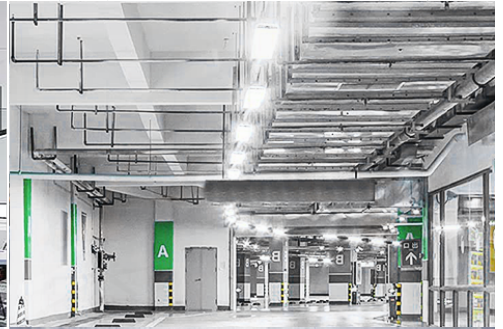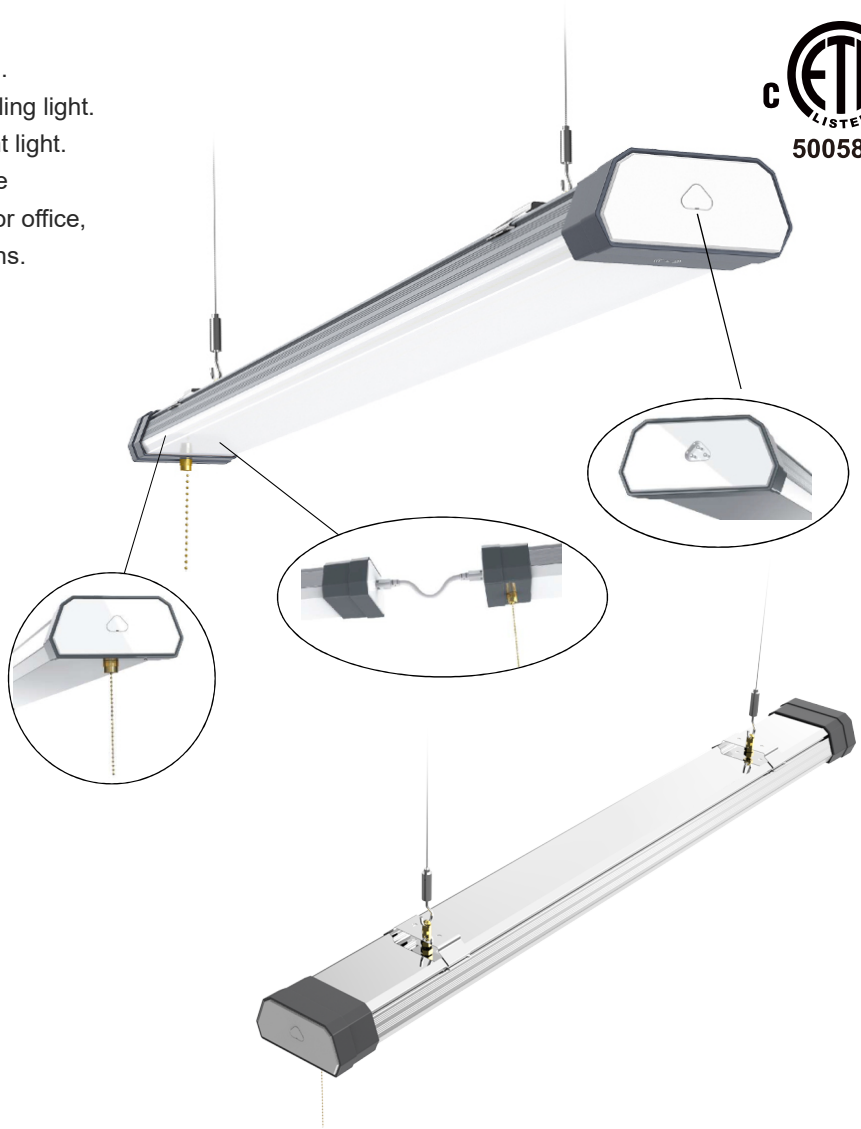

| Series       | Lumens   | Size(mm) | Beam Angle (Degree) | Electrical Data   | LED Type      | Color temperature                                | Color rendering index               |
|--------------|----------|----------|---------------------|---|---------------|--|-------------------------------------|
| NG-SL12-80W  | 10400 Lm | 1100     | 120 degree          | Input Voltage<br>120VAC±10% 50~60Hz<br><br>Power Factor(%)<br>>90 | SMD2835 chips | WW 3000 K<br>NW 4000 K<br>DW 5000 K<br>CW 5700 K | 70 70 CRI<br>80 80 CRI<br>90 80 CRI |
| NG-SL12-100W | 13000 Lm | 1100     |                     |   |               |  |                                     |
| NG-SL12-120W | 15600 Lm | 1100     |                     |   |               |  |                                     |

Size Optional Specification : 0.6m/ 0.9m/1.5m

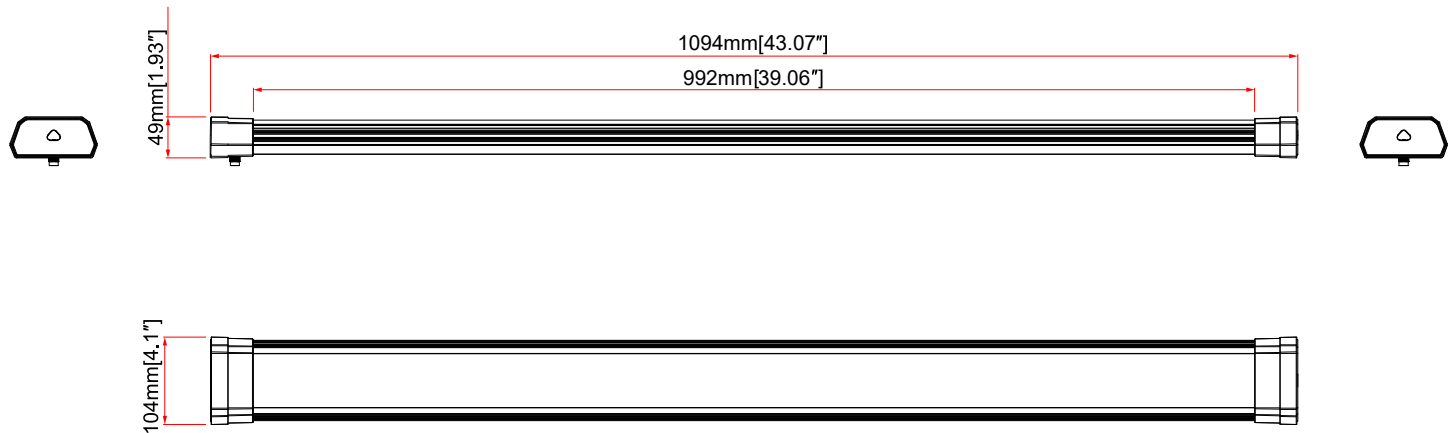


80W-120W

## INSTALLATION INSTRUCTIONS



### Method to link the fixture

1. Open the outlet protective cover on both sides of the fixture, To avoid the risk of electrical shock, Please do not open the protective cover if not use.
2. Please use T5 LED Lamp connecting wire to line the fixture, Kindly Note: Max Load Power-500W.
3. The first fixture is to connect commercial power (AC120V) by plugging in the US Plug.

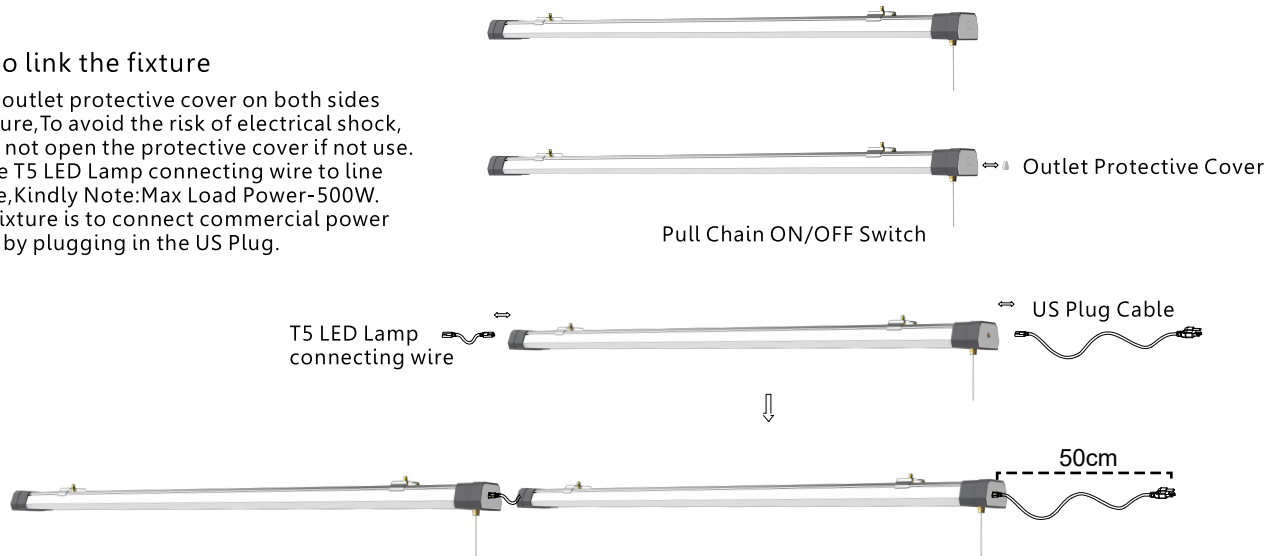


### Surface/Flush Mount




1. Drill 4 holes(diameter 6mm) into the ceiling.
2. Fix the anchor into holes.
3. Screw the mounting clips with M4 screws on the ceiling
4. Fix the shop light into mounting clips.

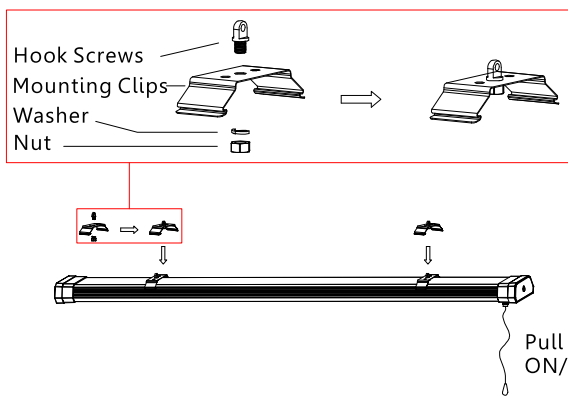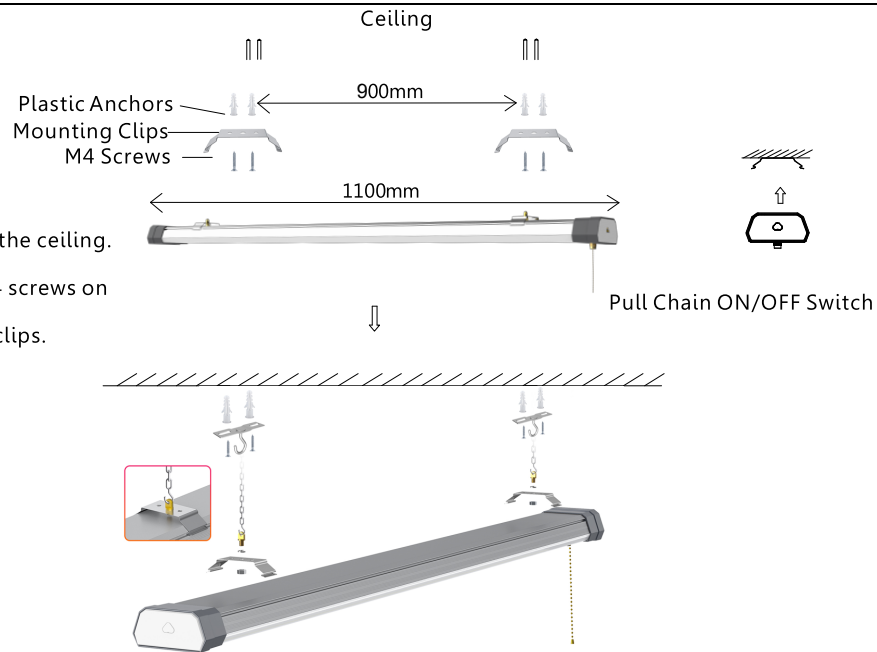

### Suspended Mount


1. Install the hook screws, washers and nuts on the mounting clips.
2. Clip the mounting clips on both sides of the light tube.
3. Drill 4 holes(diameter 6mm) into the ceiling.
4. Fix the anchor into holes.
5. Fix the mounting clips with M4 screws on the ceiling.
6. Hang the clasp according to installation height you need.
7. Hook the other side of the suspend chain on the mounting clips.

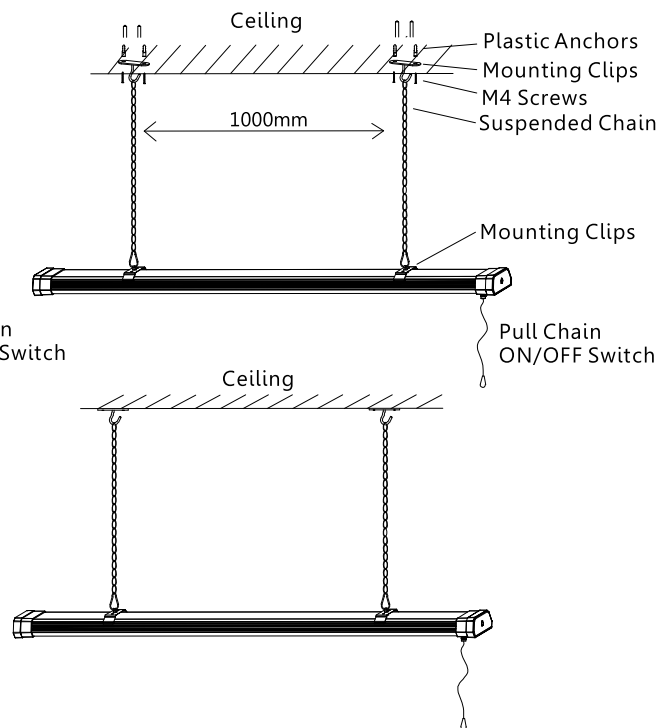

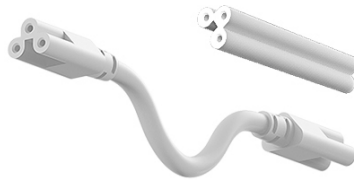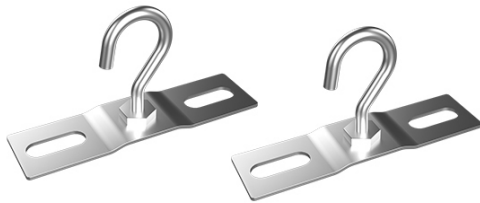**2X** Buckles**2X** Hook Screw Sets**4X** M4 Screws**4X** Plastic Anchors**1X** US Plug Cable(Length 1.8M)**1X** Connector  
**1X** T5 Linking Cord(Length 50cm)**1X** Mini Screwdriver**2X** Mounting Clips**2X** Suspended Chains(Length 1.2M)**1X** LED shop light



## 80W LED SHOP LIGHT

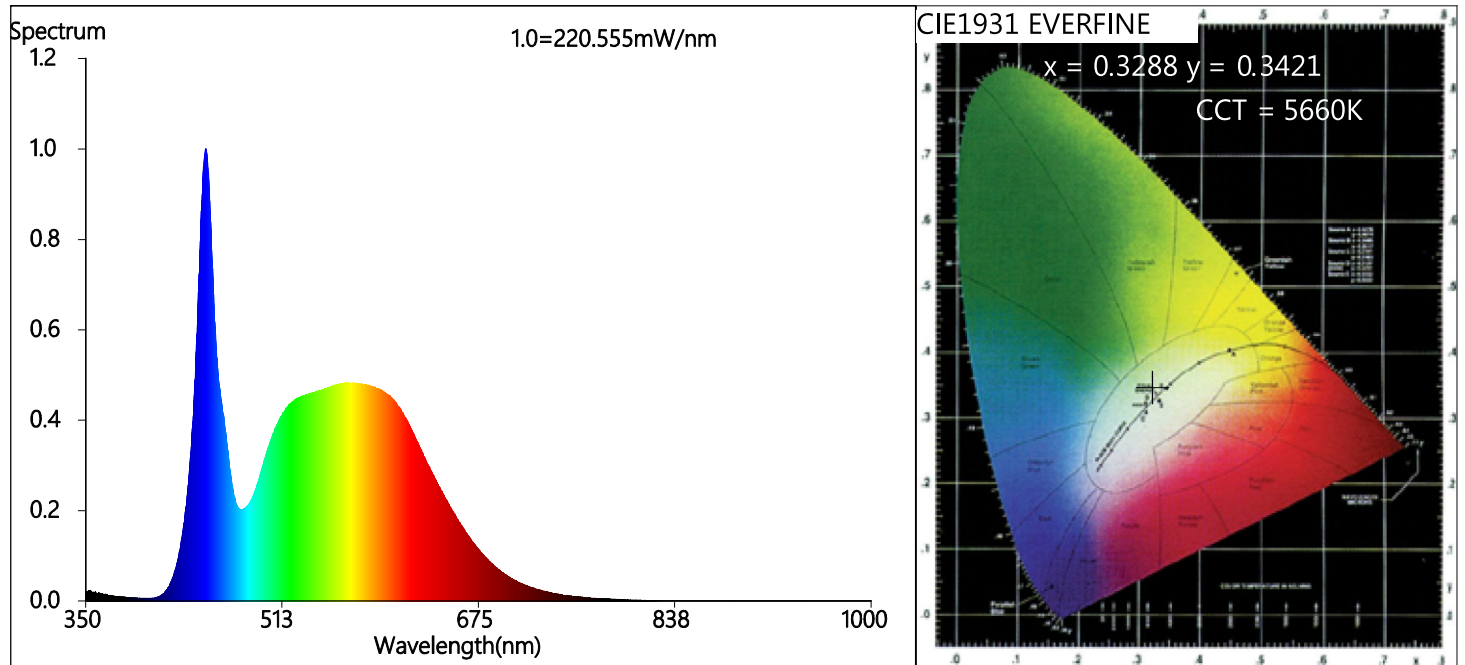

## Color Parameters :

Chromaticity Coordinate:  $x=0.3288$   $y=0.3421$   $u'=0.2040$   $v'=0.4775$

CCT=5660K(Duv=0.0021) Dominant WL:Ld = 520.3nm WL:Lc = --nm Purity=1.7%

Ratio:R=14.7% G=80.4% B=4.9% Peak WL:Lp=449.4nm FWHM=19.2nm

Render Index:Ra=83.7 AvgR=77.0 TM30:Rf=84 Rg=96 Lav=546.2nm

Eff(PPF)=1.62201

|        |        |        |        |        |        |        |
|--------|--------|--------|--------|--------|--------|--------|
| R1 =83 | R2 =87 | R3 =90 | R4 =85 | R5 =84 | R6 =83 | R7 =88 |
| R8 =71 | R9 =12 | R10=70 | R11=85 | R12=62 | R13=84 | R14=95 |
|        |        |        |        |        |        | R15=78 |

## Photo Parameters :

Flux = 10605.2 lm Eff. : 131.22lm/W Fe = 22.25 W


Photosynthetic:PPF:98.657umol/s PAR WATT:21765mW(400-700nm)

## Electrical parameters :

V = 119.80 V I = 0.6746 A P = 80.82 W PF = 0.6817

LEVEL:OUT WHITE:ANSI\_5700K

## 100W LED SHOP LIGHT

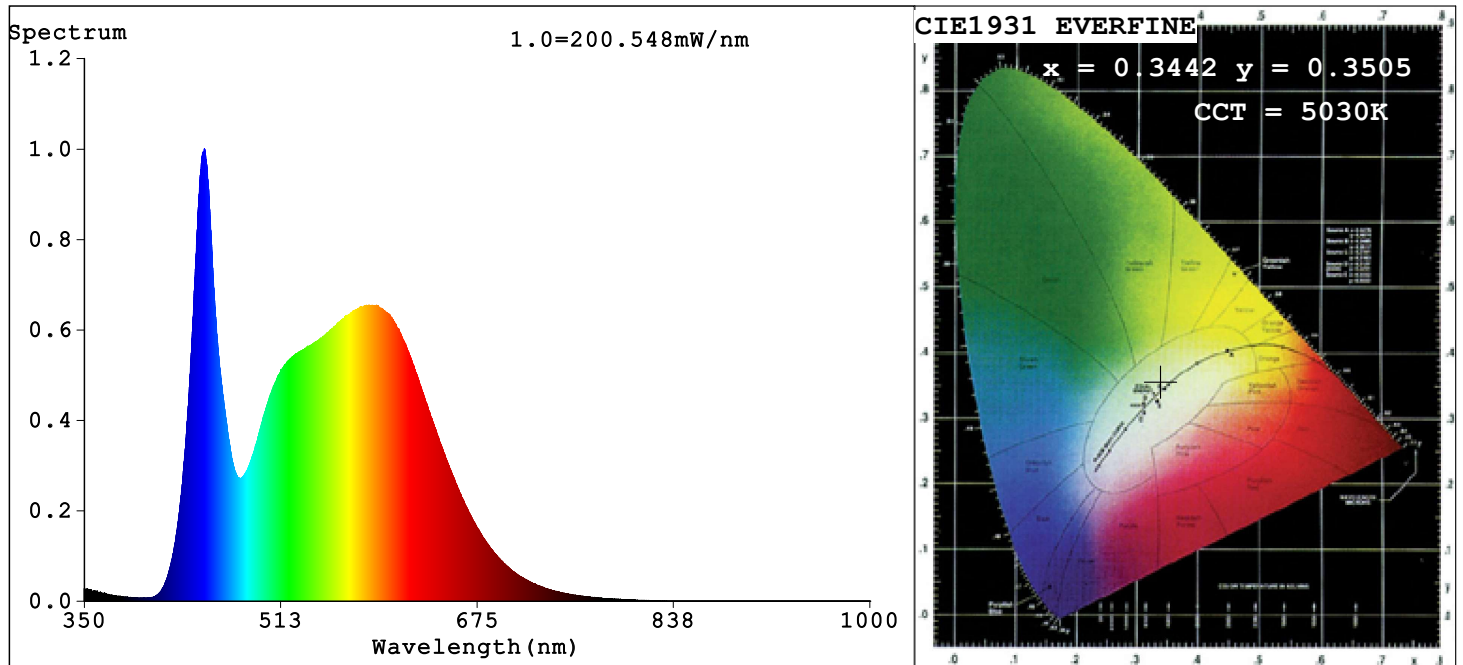**Color Parameters:**

Chromaticity Coordinate:  $x=0.3442$   $y=0.3505$  /  $u'=0.2113$   $v'=0.4840$   
 CCT=5030K (Duv=-0.0002) Dominant WL:Ld =572.6nm WL:Lc = --nm Purity=8.4%  
 Ratio:R=16.0% G=79.3% B=4.6% Peak WL:Lp=449.4nm FWHM=25.2nm  
 Render Index:Ra=84.7 AvgR=78.7


|        |        |        |        |        |        |        |        |
|--------|--------|--------|--------|--------|--------|--------|--------|
| R1 =84 | R2 =89 | R3 =93 | R4 =86 | R5 =85 | R6 =85 | R7 =87 |        |
| R8 =69 | R9 =14 | R10=74 | R11=86 | R12=70 | R13=85 | R14=96 | R15=78 |

**Photo Parameters:**

Flux = 12052.6 lm Eff. : 130.2 lm/W Fe = 26.28 W

**Electrical parameters:**

V = 120.07 V I = 1.006 A P = 92.57 W PF = 0.7663  
 LEVEL:OUT WHITE:ANSI\_5000K

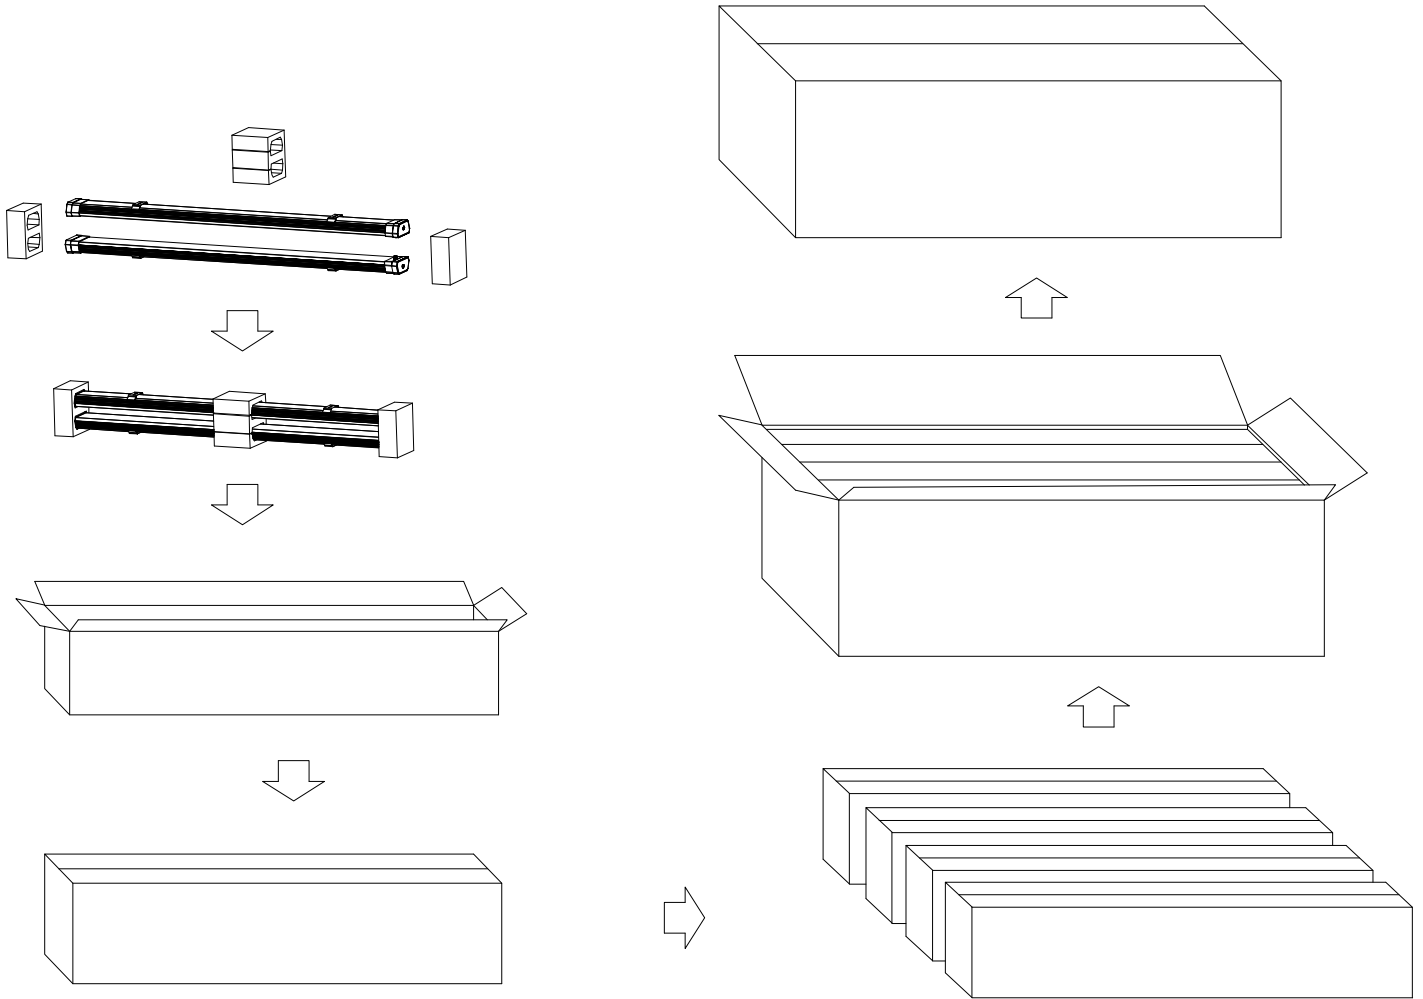

| Power    | Unit | Size           | Grass weight | Volume               |
|----------|------|----------------|--------------|----------------------|
| 80W-120W | 2PCS | 1240X140X180mm | 4.6Kg        | 0.023 m <sup>3</sup> |
|          | 8PCS | 1260X310X390mm | 19.5Kg       | 0.153 m <sup>3</sup> |